Samsung SRP-500/Maitre'D Logo Setup Guide

The Maitre'D Point of Sale system from Poisera can take advantage of the two-color graphic logo printing capabilities of the Sansung SRP-500. This document provides the Maitre'D settings required to print the SPS-500 graphic logo.

Maitre'D Printer Type Setup

1. Enter the point of sale module and select **Printer type** form the **Workstation** menu.

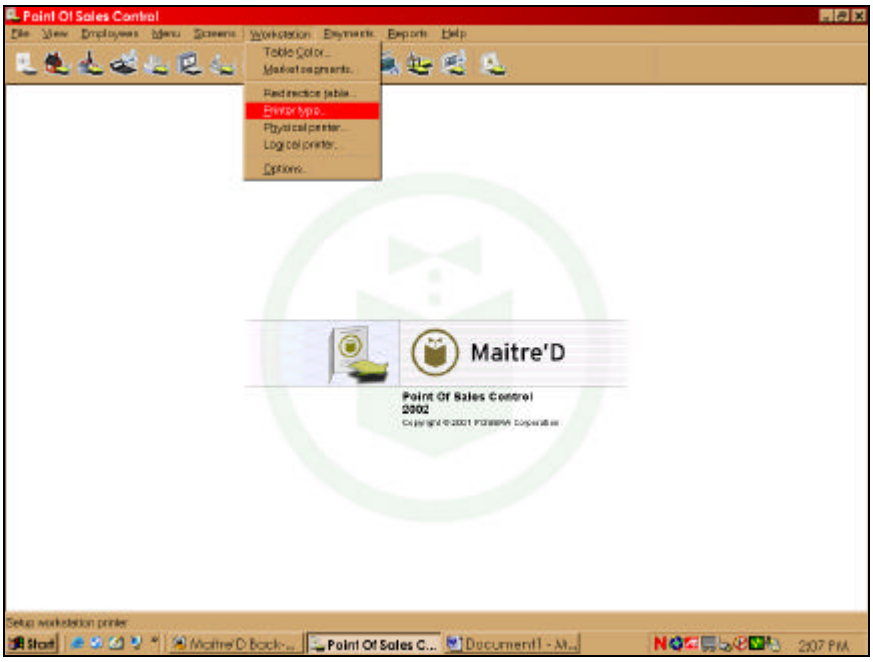

2. Select the Samsung 270 printer setup

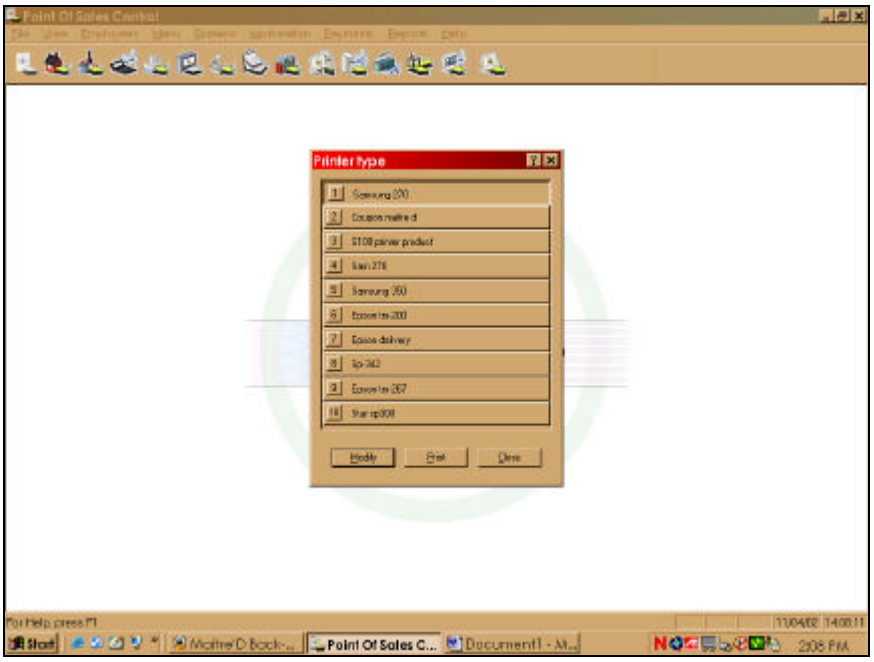

3. Select the code tab and enter 1B6701 into the page set up command line.

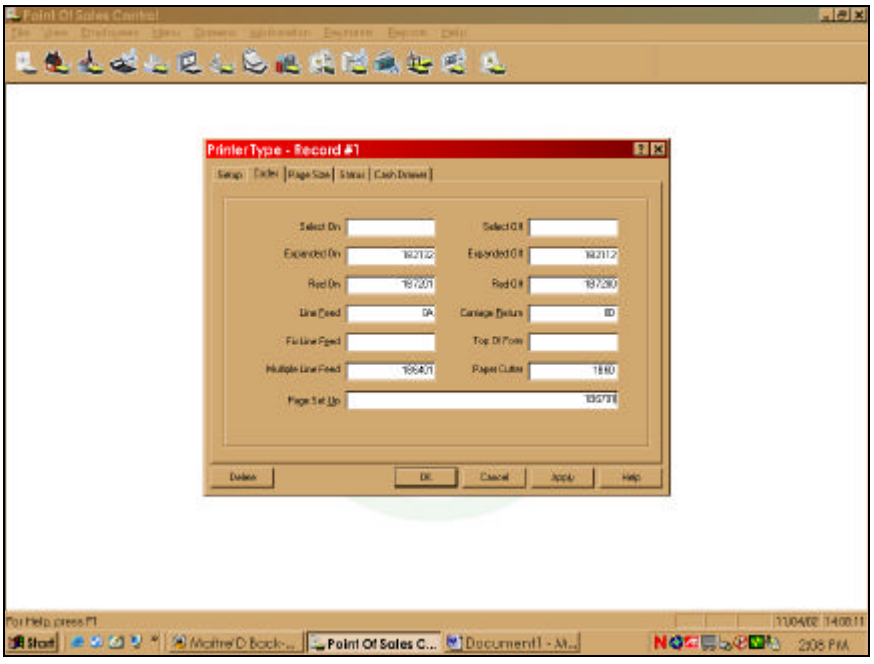

NOTE: Use the page setup command 1B6701 to print the first image loaded into the SRP-500. Use the sequential commands, 1B6702 to 1B6710 to print the remaining 9 images that may be stored in the SRP-500.

Define Serial Port Parameters

Use the Define Serial Port Parameters program to verify that the PRINT BITMAP option is set to Y (yes).

1. Select SERIAL PORT DEVICE SELECTIONS from the S-MODE PROGRAMMING MENU to display the SERIAL PORT DEVICE SELECTIONS screen. The current selections for PORT#1 display.

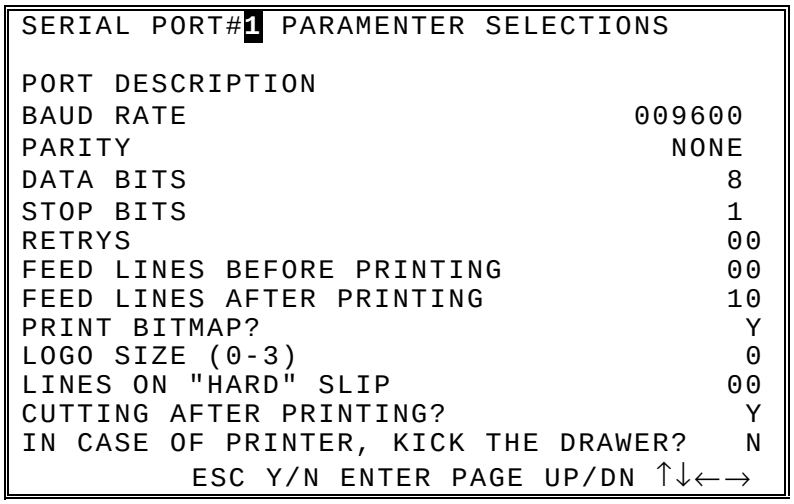

2. Press the **PAGE UP** or **PAGE DN** keys to select the port you wish to view or edit.
3. Press the ↑ or ↓ keys to move the active cursor to the option you wish to change. Verify that the PRINT BITMAP field is set to Y (yes).
4. At the LOGO SIZE field, select 0= Normal, 1= Double Wide, 2 = Double Height, 3 = Double Height and Width.
5. Press **ESC** to return to the S-MODE PROGRAMMING MENU.